



3.5M TRI-AXLE Drop Deck Widener

THE ORIGINAL AND PROVEN WIDENER


Standard Features

Payload^	Up to 29t	Rear Ramps	Heavy-duty ramps; 2950mm x 900mm box tube with a 5mm 700 grade steel plate surface and welded grip strips
ATM	44,000 kg	Upper Ramps	Aluminium 3-piece flip-over
GTM	25,000 kg	Paint	Fully sandblasted, primed, and finished in two high quality 2-pack paint, with a choice of colours; anti-slip grit on deck
Deck Width	2.5m – 3.5m	Suspension	Fuwa K Hitch mechanical tri-axle suspension with 19.5" 8 stud hubs
Deck Height	0.975 m	Hydraulics	Dual acting heavy-duty 3" cylinders fit with premium valves and 12V power pack
Deck Lengths	13.4m (45ft model), 13.75m (46ft model), 14.3m (48ft model)	Landing Gear	2 Speed Fuwa K Hitch landing legs
Overall Lengths	13.73m (45ft road train compliant model), 14.08m (46ft model), 14.63m (48ft model); custom lengths available on request	Wheels	Steel painted rims with 265/70 19.5" tyres
Main Rails	350 grade webs and flanges; 20mm lower flange, 16mm upper flange	Electrics	175A Anderson plug, 12V lead acid battery, multi-volt LED lighting with beacon
Coaming Rails	200mm and 125mm PFC with 22 chain bars and rope rails	Toolbox	Powder coated lockable toolbox with stainless door (1200mm x 350mm x 400mm)
Flooring	5mm 700G on decks and ramps with 33 in-deck tie down points	Water Tank	Polished 60L aluminium water tank
Chain Points	33 in-deck tie-down points; 22 coaming chain bars	Oversize Signage	Custom spring-loaded flip-over signs
Tyre Carrier	Tyre carrier suited for 19.5" spares	Flag Holders	Front and rear flag holders
Front Gate	1600mm high heavy-duty gate		

3.5M TRI-AXLE Drop Deck Widener

Rated to carry a 25t payload at full width[†]

BRIMARCO

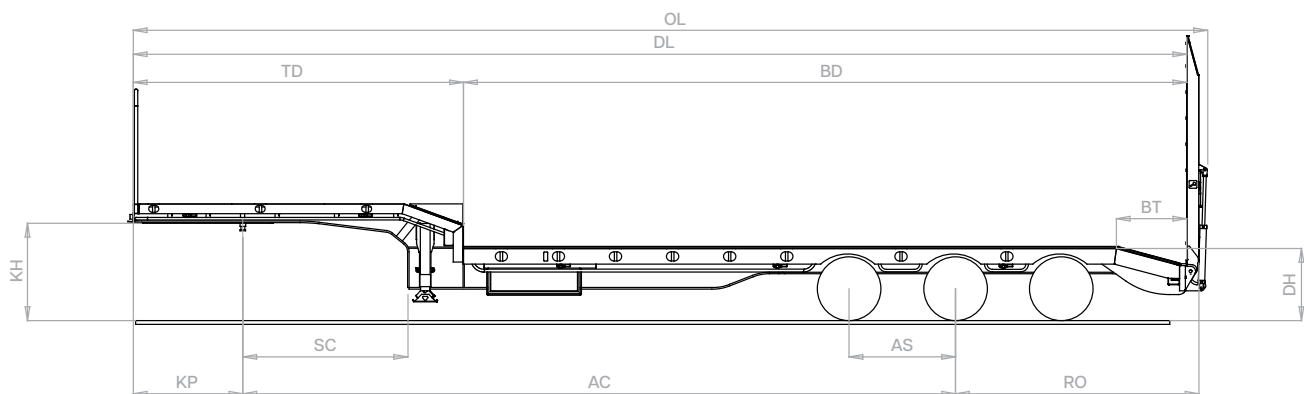

	Length		Deck				Other					
Model	OL	DL	TD*	BD	BT	DH	KH	KP	SC	AC	AS	RO
Road Train												
CRF	13.73 (45ft)	13.4	4.3	9.1	0.55	0.975	1.27	1.43	2.4	9.3	1.4	3.0
Standard												
CAF	14.08 (46ft)	13.7	4.3	9.45	0.9	0.975	1.27	1.43	2.4	9.3	1.4	3.35
Maximum												
CMF	14.63 (48ft)	14.3	4.3	10	0.9	0.975	1.27	1.43	2.4	9.5	1.4	3.7

Legend

OL Overall Length	DL Deck Length	TD Top Deck	BD Bottom Deck
BT Beaver Tail	DH Deck Height	KH Kingpin Height	KP Kingpin Centre
SC Swing Clearance	AC Axle Centreline	AS Axle Spacing	RO Rear Overhand

Note: All dimensions are listed in metres (m)

[†]Top deck length includes flip over ramp in position shown. For custom lengths or other special requirements please contact Brimarco directly. ^{*}Payload refers to engineered structural capacity. On-road limits depend on local regulations and vehicle configuration. ^{*}DISCLAIMER: 5 Year Warranty applies to structural defects only. Optional Feature availability dependent on individual trailer configuration

Optional Features

- + Air Suspension available on all drop deck trailers
- + Roadtrain provision and coupling
- + Customised lighting and electrical systems
- + Petrol, diesel or PTO hydraulic systems
- + Hub-odometers, RightWeigh gauge, and telematic systems
- + Alloy and spare wheels
- + Stainless coaming rail protectors and vinyl scrollwork
- + Electric winch
- + Custom deck lengths
- + Extra Toolboxes including in-deck toolboxes
- + Gate Pockets, Customised deck tie-down layouts, and 3-Way Twistlock Pedestals
- + Extra-Wide, Bi-Fold, or Aero-fold Ramps

BRIMARCO

Engineered **Strength.**
Built **Together.**

(03) 5339 1000

17-19 Coronet Street, Wendouree VIC 3355
sales@brimarco.com.au



View Online

Full specs, features,
videos and more at:
brimarco.com.au

